

LITHIUM IRON PHOSPHATE BATTERY

ELECTRICAL SPECIFICATIONS

Nominal Voltage	12.8 V
Nominal Capacity	480 Ah
Capacity @ 0.2C	>290 min
Energy	6144 Wh
Resistance	<30 mΩ
Efficiency	99%
Self Discharge	<3% per Month
Maximum Modules in Series	1




DISCHARGE SPECIFICATIONS

Maximum Continuous Discharge Current	300 A (20mins)
Peak Discharge Current	1000 A (3seconds)
Recommended Low Voltage Disconnect	11 V
PCM Discharge Voltage Cut-Off	10 V
Reconnect Voltage	12 V
Short Circuit Protection	Yes

TEMPERATURE SPECIFICATIONS

Discharge Temperature	-30 to 60 °C
Charge Temperature	-30 to 60 °C
Storage Temperature	-30 to 60 °C
PCM High Temperature Cut-Off	176 °F (80 °C)

DIMENSIONAL SPECIFICATIONS

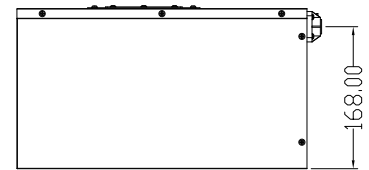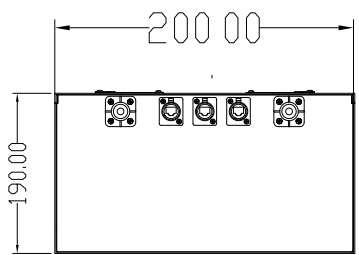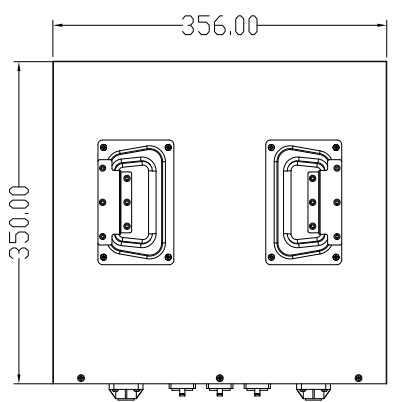

MECHANICAL SPECIFICATIONS

Dimensions (L x W x H)	356 x350 x190 mm
Weight	42.0kg
Terminal Type	M8
Case Material	Metal
Enclosure Protection	IP54
Chemistry	LiFePO ₄

CHARGE SPECIFICATIONS

Recommended Charge Current	< 50 A
Maximum Charge Current	200 A
Recommended Charge Voltage	14.2 V - 14.6 V
PCM Charge Voltage Cut-Off	15.6 V
Reconnect Voltage	15.2 V
Balancing Voltage	Active 3.4V/cell, 30mV gap

BATTERY FUNCTIONS

Bluetooth	Yes
Active Cell balance	Yes
Heater	Yes
Victron CAN interface	Yes